


Single-row cylindrical roller bearings

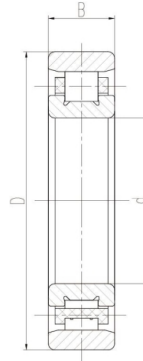

Dimensiones principales (mm)			Designación	Clasificaciones de carga básicas		Velocidad limitada		Peso (kg)
d	D	B		Dinámica	Estático	Grasa	Aceite	
50	80	16	N1010	36	41.5	8000	9300	0.29
50	90	20	N210	38.2	40.6	6500	8500	0.29
55	90	18	N1011	41.5	50	7300	8600	0.44
55	100	21	N211	40.5	45.7	6000	7500	0.44
60	95	18	N1012	34.2	43.3	6600	800	0.47
60	110	22	N212	67.1	73.5	550	6500	0.47
65	100	18	N1013	40	54.4	630	7300	0.49
65	120	23	N213	77.2	91.5	5500	6500	0.49
70	110	20	N1014	38.9	54.6	6000	6600	0.69
70	125	24	N214	77.1	91.7	4600	5600	0.69
75	115	20	N1015	48.9	61.7	5600	6300	0.72
75	130	25	N215	79.2	96.6	4500	530	0.72
80	125	22	N1016	48.2	62.8	5000	5600	0.98
85	130	22	N1017	49.1	65.3	5000	5600	1.04